PRODUCT IMAGES




PRODUCT FEATURES:

Type:Angle valveCode:A280-BMaterial:BrassFinishing:Chrome

Hexagonal angle valve1/2"X1/2"

Plating thickness passes NSS 96H test under lab conditions!

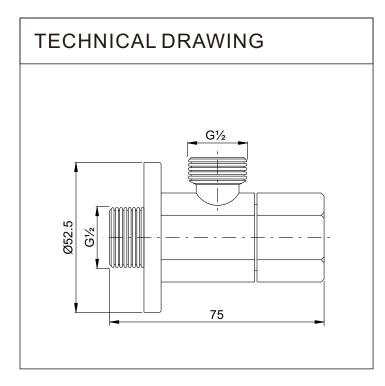

CARE AND MAINTENANCE

- 1. WASH REGULARLY, DYT WITH SOFT COTTON CLOTH.
- 2. DONT USE PUTTY-POWDER AND POLISHING POWDER WHICH WASH WITH COARSE GRANULE.
- 3. DONT USE ACID WASH.
- 4. CLEARN THE DEPOSIT SEDIMENT REGULARLY .

HOW TO CLEAN

- 1. WASH USE WATER AND SOFT COTTON CLOTH.
- 2. USE FOLLOWING THE WASH:
- CLIMATE LIQUIDS WASH.
- NO COLOUR GLASS WASH.
- •SHINE WASH WITHOUT WEAR AND TEAR.

3. AFTER WASHING, USE THE WATER CLEARN, AND DRY BY SOFT COTTON CLOTH.

- IMPORTANT TO RETAIN FOR FUTURE RETAIN FOR FUTURE REFERENCE
- ACCORDING TO LOCAL PIPING AND CONTRUCTION INSTRUCTION.
- INLET PIPE NEED THE CORRECT LENGTH ACCORDING THE DISTANCE BETWN THE OUTLET HOLE AND BASIN.
- BE CAREFULLY INSTALL THE NUT AND FLAT TO AVOID SCRATCH THE BODY AND TUBE.
- BE CAREFULLY INSTALL THE RUBBERTO AVOID LEAK WATER.