

# INFINITY



## WATER CLOSET

PRODUCT ID

RB.INF.03G119.01.09 /RB.INF.04G104.01.04/RB.TIF.OPA661.DU.01

Vitreous China floor standing close coupled, back to wall Water Closet (toilet) suite with wash down 4.5/3 litre dual flushing. Has horizontal outlet and cistern with water inlet from bottom.

### FEATURES

- Vitreous China water closet
- Contemporary design
- Flushing mechanism with duo water saving buttons
- Close coupled tank
- Bottom inlet
- Universal outlet
- Fully glazed trap way
- 100% factory vacuum tested

### INCLUDED COMPONENTS

- Top mounted flush actuator
- Mounting hardware
- Flushing mechanism
- Seat and cover
- Bolt caps

### WARRANTY

- 25 year written warranty against crazing and dunting

### STANDARDS APPLICABLE

- Specified model meets or exceeds the following:
- BS 3402 : 1969
  - AS 1976 : 1992
  - BS EN 997 : 2018
  - AS 1172 : 2014
  - BS EN 33 : 2019
  - BS EN 14055 : 2018

### SEAT AND SEAT COVER

Product ID - Duraplex : RB.TIF.OPA661.DU.01

- Ergonomically designed duraplex seat and cover with soft closing and quick release mechanism
- Soft close (controlled seat fall) – the seat cover closes slowly with no intervention by the user
- Seat and cover are strong, burn and scratch resistant, totally water proof
- Stainless steel hinges
- Quick release mechanism with lift off hinge design for easy cleaning
- UV protection




## TECHNICAL INFORMATION

\*\* Approximate measurements for comparison only

CONFIGURATION	TWO PIECE , CLOSE COUPLED
Water per flush	4.5L of water for solid waste and 3L of water for liquid waste
Water depth from rim	245 mm
Trap Diameter	97-102 mm
Distance from floor to waste outlet centre	185 mm
Distance between seat post hole centres	150 mm
Weight (WC + tank)	34 + 14.5
Bowl Size	325 X 275 X 155 mm
Nominal Dimensions	630 X 350 X 405 mm

## TECHNICAL DRAWINGS

All drawings contain the necessary measurements, which are subject to standard tolerances. They are stated in mm, are drawn on a scale of 1:20 and are non-binding. Exact measurements, in particular for customized installation scenarios, can only be taken from the finished ceramic piece.

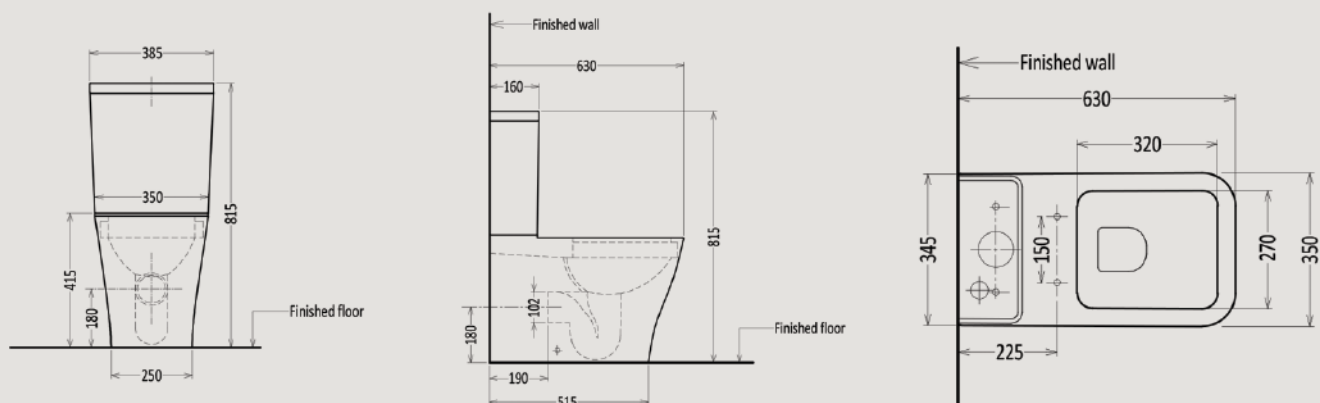

## INSTALLATION NOTES

- 97 mm -107 mm waste outlet is required for this installation
- 2 cm gap between the toilet and the wall is required
- This toilet must be secured to the floor using the supplied floor anchors and bolts
- Install this product according to the installation guide bellow or scan for instructions

