



## WATER CLOSET

PRODUCT ID RB.AVS.03G209.01.08 / RB.TAV.0PA661.DU.01

Vitreous China wall hung, back to wall Water Closet suite, featuring a wash down 4.5/3 L concealed dual flushing system.

#### **FEATURES**

- Vitreous China wall hung water closet
- Contemporary design
- Concealed flushing mechanism with duo water saving buttons
- Fully glazed trap way
- 100% factory vacuum tested

## INCLUDED COMPONENTS

- Seat and cover
- Mounting kit

#### WARRANTY

• 25 year written warranty against crazing and dunting

#### STANDARDS APPLICABLE

Specified model meets or exceeds the following:

- BS 3402 :1969
- AS 1976 : 1992
- BS EN 997 : 2018
- AS 1172 : 2014
- BS EN 33 : 2019
- BS EN 14055 : 2018

## SEAT AND SEAT COVER

Product ID - Duraplex :

- Ergonomically designed duraplex seat and cover with soft closing and quick release mechanism
- Soft close (controlled seat fall) the seat cover closes slowly with no intervention by the user
- Seat and cover are strong, burn and scratch resistant, totally water proof
- Stainless steel hinges
- Quick release mechanism with lift off hinge design for easy cleaning
- UV protection



#### www.rocellbathware.com

# AVESA WATER CLOSET


## TECHNICAL INFORMATION

\*\* Approximate measurements for comparison only

| CONFIGURATION                           | WALL HUNG WATER CLOSET   |
|---|--|
| Water per flush                         | 4.5L of water for solid waste and 3L of water for liquid waste |
| Water depth from rim                    | 220 mm   |
| Trap diameter                           | 97-102 mm  |
| Distance between seat post hole centers | 155 mm   |
| Weight (WC+Tank)                        | 33 + 13.5 kg   |
| Bowl Size                               | 565 x 385 x345 mm  |
| Nominal Dimensions                      | 565 x 385 x345 mm  |
|   |  |

## TECHNICAL DRAWINGS

All drawings contain the necessary measurements, which are subject to standard tolerances. They are stated in mm, are drawn on a scale of 1:20 and are non-binding. Exact measurements, in particular for customized installation scenarios, can only be taken from the finished ceramic piece.

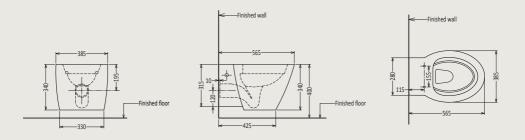

## INSTALLATION NOTES

- 97 107 mm waste outlet is required for this installation. Waste out let fittings are included within concealed tank unit.
- Install this product according to the installation guide bellow or scan for instructions



Royal Ceramics Lanka PLC. No.20, R.A. De Mel Mawatha, Colombo 03, Sri Lanka. ⓒ 076 6 223 344 ⊠ info@rcl.lk ⊕ www.rocell.com

FOLLOW US

\*\* Dimensions of fixtures are nominal and may vary within the range of tolerance. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided leaflet.